

## Flowshield LXP (1.5 mm)



### Description

A two pack, solvent free, flexible polyurethane topping applied at 1.5 mm.

### Uses

For use over asphalt, wood, steel and concrete; to provide a flexible, easy to clean, chemical resistant floor topping. Typical uses are process, manufacturing, packaging and warehousing areas subjected to heavy foot and pallet truck traffic & where a degree of flexing of the floor is expected.

### Benefits

- Seamless finish (except for underlying slab joints)
- Excellent chemical resistance to sugars & acids.
- Easy to clean & sterilise, low maintenance requirement.
- Flexible, can be used over asphalt, wood & steel.
- High abrasion resistance.
- Solvent free; low odour.

### Standard colour chart



Goosewing Grey 222



Tile Red 637



Mid Grey 280



Emerald Green 740




Beige 326



Yellow 340

The applied colours may differ slightly from the examples shown above. Contact our customer services for a true colour sample or a special colour match.

### System Design

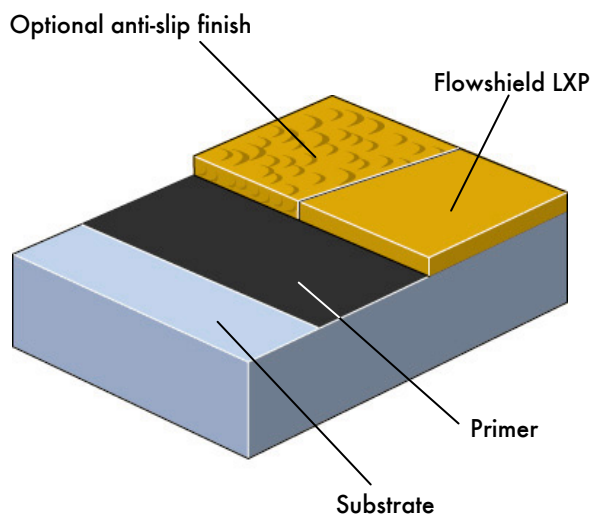

## Model Specification

Product: Flowshield LXP

Finish:

Thickness: 1.5 mm

Colour: \_\_\_\_\_

Preparatory work and application in accordance with suppliers instructions.

Supplier: Flowcrete UK Limited

Telephone : Customer Service - +44 (0) 1270 753000

## Installation Service

The installation should be carried out by a Flowcrete approved contractor with a documented quality assurance scheme.

Obtain details of our approved contractors by contacting our customer service team or enquiring via our web site [www.flowcrete.com](http://www.flowcrete.com)

## Products Included in this System

Primer:

Concrete: Flowprime LXP @ 0.3 kg/m<sup>2</sup> -  
(Porous substrate may require 2 coats)

Steel: Peran Primer W @ 0.25 kg/m<sup>2</sup>

Wood: Flowprime LXP @ 0.3 kg/m<sup>2</sup>

Asphalt: Flowprime LXP @ 0.3 kg/m<sup>2</sup> -  
(Porous substrate may require 2 coats)

Topping: Flowshield LXP (density 1.5 kg/l)  
@ 2.3 kg/m<sup>2</sup> for 1.5 mm

For slip resistant dressings, please consult our Technical Advisors.

Detailed application instructions are available upon request.

## Focus on the Floorzone

Flowcrete Group plc are world leaders in specialist industrial and commercial flooring. Systems available include: underfloor heating systems, floor screeds, surface damp proof membranes, decorative floor finishes, seamless terrazzo, car park deck waterproofing, tank lining systems... to name just a few. Our objective is to satisfy your Floorzone needs.

## Flooring Design Service

Special corporate colours and designs can be produced to special order.

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry to 75% RH as per BS 8204 and free from rising damp and ground water pressure. If no damp proof membrane is present Hydraseal DPM can be incorporated directly beneath the Flowshield system.

## Life Expectancy

5 - 10 years, subject to correct maintenance regime.

## Important Note

Flowcrete's products are guaranteed against defective materials and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies of which can be obtained on request.

## System Performance Guide

Complies with BS 8204-6/FeRFA type 5.

The table below shows how well the system complies with different characteristics.

A scale of 1 - 5 where 5 is the best value.

5 Excellent, 4 Very Good, 3 Good (Pass), 2 Fair, 1 Poor

|                    |   |                     |   |
|--------------------|---|---------------------|---|
| Fire Safety        | 3 | Impermeability      | 5 |
| Slip Resistance    | 1 | Cleanability        | 5 |
| Impact Resistance  | 5 | Wear Resistance     | 4 |
| Thermal Resistance | 4 | Chemical Resistance | 3 |
| Heavy Traffic      | 4 | Scratch Resistance  | 3 |

## Technical Information

The figures that follow are typical properties achieved in laboratory tests at 20 °C and at 50% Relative Humidity.

|  |  |
|--|--|
| Fire Resistance  | BS 476:Part 7  |
| Slip Resistance  | Surface spread of flame: Class 2<br>TRRL Pendulum Slip Test<br>Dry 74 Wet 23 |
| Slip values are given as a guide only.<br>Final slip value achieved will depend on the application method and specification. |  |
| Temperature Resistance   | Tolerant up to 60 °C   |
| Water Permeability   | Nil - Karsten test (impermeable)   |
| Surface Hardness   | 65 (Shore D)   |
| Chemical Resistance  | Go to <a href="http://www.flowcrete.com">www.flowcrete.com</a>               |
| Abrasion Resistance  | BS 8204-2 Class AR2 -<br>Medium duty industrial and commercial.              |
| Flexural Strength  | > 15 N/mm <sup>2</sup> (BS 6319)   |
| Tensile Strength   | > 10 N/mm <sup>2</sup> (BS 6319)   |
| Elongation at break  | 60% (BS 6319)  |
| Tear strength  | 11 MPa . (BS 6319)   |
| Bond Strength  | Greater than cohesive strength of<br>25N/mm <sup>2</sup> concrete. >1.5 MPa. |

## Speed of Cure

|                    | 10 °C   | 20 °C  | 30 °C  |
|--------------------|---------|--------|--------|
| Light traffic      | 36 hrs  | 24 hrs | 12 hrs |
| Full traffic       | 72 hrs  | 48 hrs | 24 hrs |
| Full chemical cure | 12 days | 7 days | 7 days |

## Aftercare - Cleaning and Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent.

## Environmental considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

## Further Information

To ensure you are specifying a fit for purpose flooring for your project please consult our Technical Advisors on the number below or visit our website to register your interest in specifying one of the most durable floors on the market.

**Flowcrete Group plc**  
Booth Lane Moston Sandbach,  
Cheshire CW11 3QF  
UK  
Tel: +44 (0) 1270 753000  
Fax: +44 (0) 1270 753333  
Email: [uk@flowcrete.com](mailto:uk@flowcrete.com)

**Flowcrete Europe Ltd**  
Booth Lane Moston Sandbach  
Cheshire CW11 3QF  
UK  
Tel: +44 (0)1270 753000  
Fax: +44 (0)1270 753333  
Email: [uk@flowcrete.com](mailto:uk@flowcrete.com)

**Flowcrete Asia Sdn Bhd**  
Lot 37631 & 37632 Jalan 6/37A  
Taman Bukit Maluri  
Industrial Area Kepong,  
52100 Kuala Lumpur, Malaysia  
Tel: +60 3 6277 9575  
Fax: +60 3 6277 4645  
Email: [malaysia@flowcrete.com](mailto:malaysia@flowcrete.com)

**Flowcrete North America, Inc.**  
11133 I-45 South  
Suite J, Conroe  
Texas 77302  
U.S.A.  
Tel: +1 936 539 6700  
Fax: +1 936 539 6701  
Email: [usa@flowcrete.com](mailto:usa@flowcrete.com)

**Flowcrete**  
for the world at your feet